



Tools Required

- Phillips head screw driver



Approximate Assembly Time

20 minutes

Broil King®
KEG

READ ME FIRST

UNPACKING & ASSEMBLY INSTRUCTIONS


911050 / 2000 Series



The only tools you will need:

- Phillips head screw driver
- ½inch or 13mm wrench

LINE ITEM	QTY	PART NAME
1	1	Grill Body
2	1	Temperature Gauge
3	1	Lid Handle
4	2	Handle Screws M5 x 38
5	10	Handle Screws M5 x 55
6	1	Cast Iron Cooking Grate
7	1	Charcoal Grate
8	1	Fire Bowl
9	2	Side Handles
10	2	Handle Gaskets
11	4	Legs
12	1	Hoop
13	4	Hoop Brackets
14	8	Leg Screws
15	8	Bracket Screws
16	8	Leg Washer

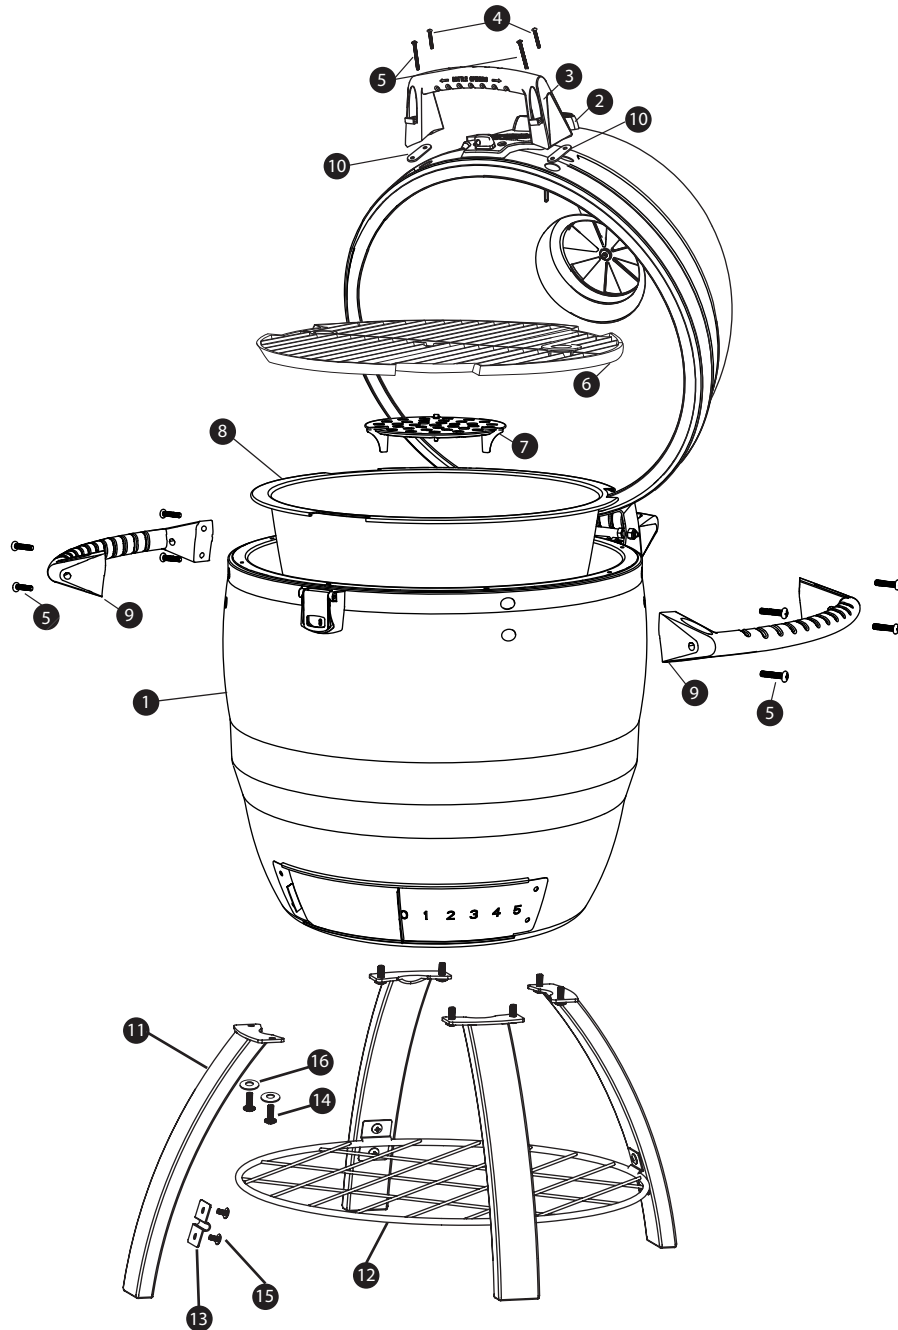

M5 x 55
(Qty:10)




M5 x 38
(Qty:2)



M8 x 20
(Qty:8)



M6 x 15
(Qty:8)




Washer
(Qty:8)




ACTUAL SIZE

Proper assembly of your new BROIL KING KEG® will only require a Phillips head screw driver, a ½ inch or 13mm wrench and a buddy (for lifting). Follow the steps outlined below and it should take approximately 20 minutes to complete. Refer to illustration on page 2 for part(s) identification and placement positions.


NOTE: Hand tighten all screws during placement and securely tighten with screwdriver when all parts of that assembly are in place.

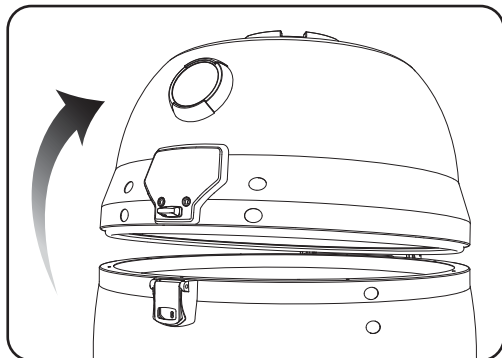

STEP 1: Unlock clasp and open the Keg's lid. Remove and unpack all contents and check against parts inventory list.

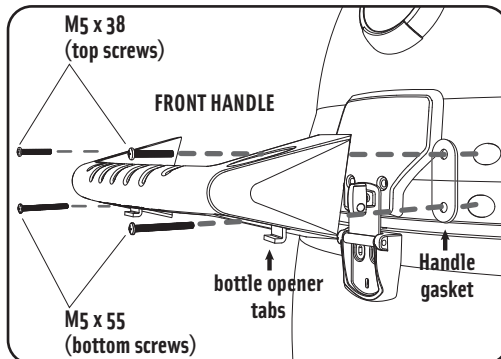


STEP 2: Attach front handle with Phillips head screwdriver. M5 x 55 screws go in the bottom holes with the bottle opener tabs. M5 x 38 screws go in the top holes. Silicone gaskets install behind handle (two places).

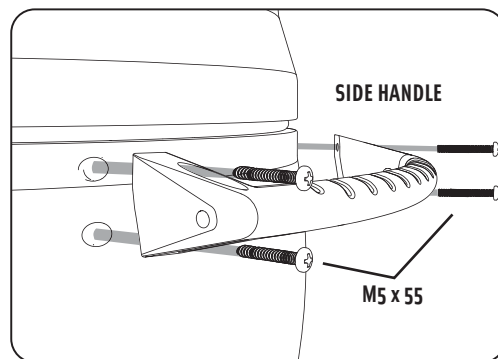


STEP 3: Attach side handles (2) using 4 (M5 x 55) screws. Use Phillips head screwdriver. Note the "Bottom" written on the handle and orient down.


NOTE: With all handle screws in place, securely tighten with screwdriver.

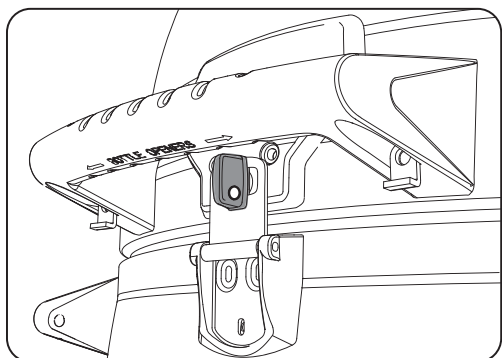


STEP 4a: With everything out of the grill, re-lock clasp on the Keg's lid.

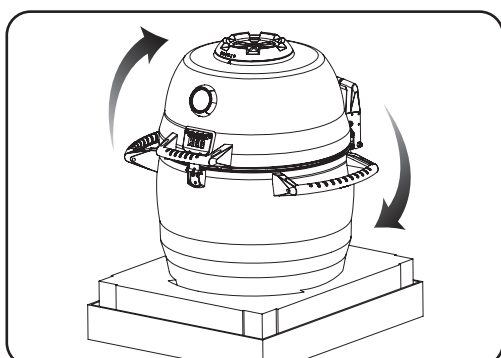


STEP 4b: With your buddy's help, flip the grill upside down and place back into the styrofoam, on its lid.

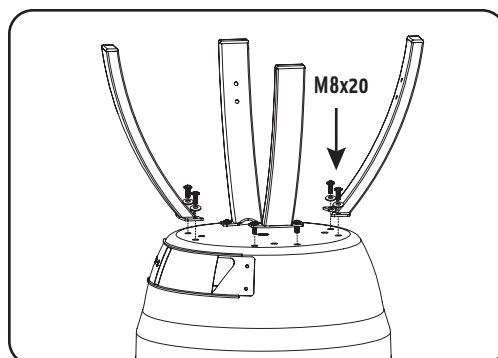



STEP 5: Screw the legs into the threaded inserts in the bottom of the grill using the leg washer and M8x20 screws, (hand tighten only).

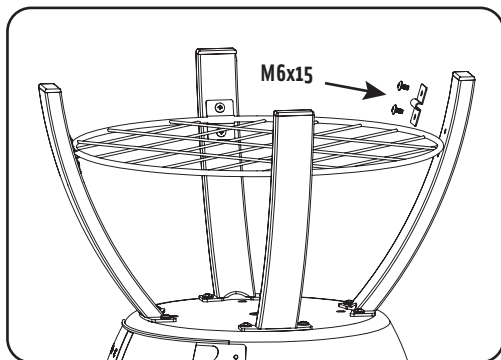


STEP 6: Assemble the Hoop to the legs using the Hoop Brackets and the M6x15 screws as shown. Tighten all leg and hoop bracket screws with a screwdriver.

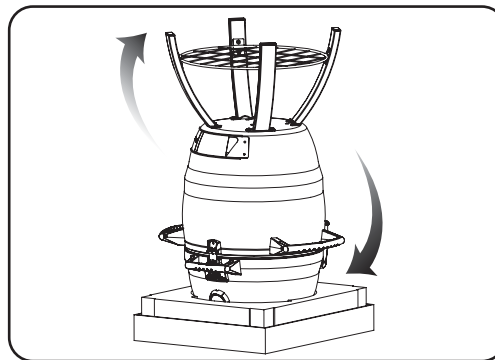

STEP 7: With your buddy's help, flip the grill right side up on to the floor.

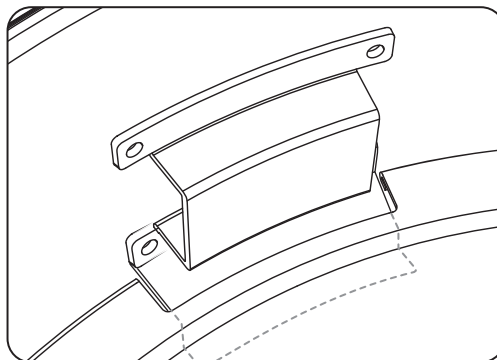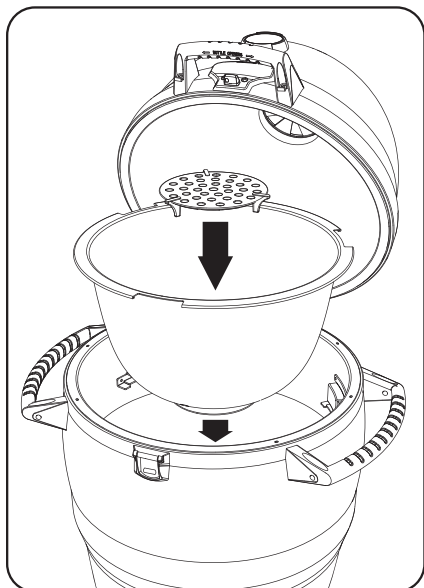


STEP 9: Align the notches in the fire bowl with the fire bowl supports inside the grill (as illustrated).

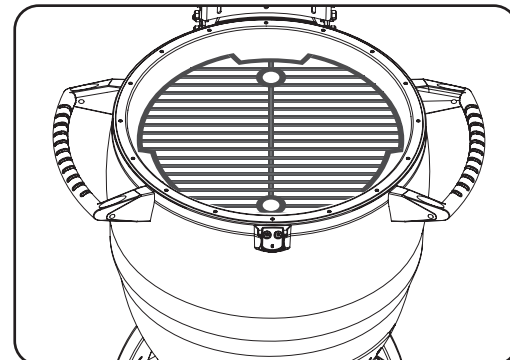

STEP 10: Install the Cast Iron Cooking Grate.

STEP 8: Now that the grill is securely on the stand, open the lid and put the following parts in place starting at the bottom of the BROIL KING KEG®:

- Fire bowl
- Charcoal grate

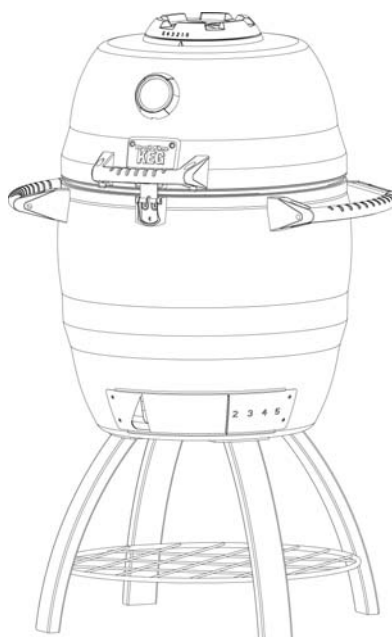

Now you're ready to season the grill and start cooking!

Please read the BROIL KING KEG® Operation Handbook for complete information about safe and proper use of this product.

Broil King®
KEG

For more information and our complete line of accessories visit us at
www.broilkingbbq.com

ONWARD MANUFACTURING COMPANY LTD.

585 Kumpf Drive • Waterloo, Ontario, Canada • N2V 1K3

info@omcbbq.com • Phone: 519.885.4540 • Fax: 519.885.1390

North America Customer Service: 1.800.265.2150